


Elastomeric Round Mount

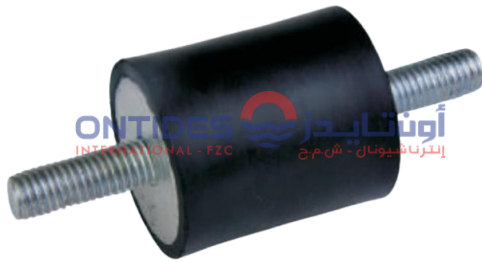

1. Compliance:

British Standards, BS 3974 : Part I

2. Application:






Suitable for high frequency vibration / noise generated from Fan Coil Units, Axial Fans, Pumps, Blowers etc...

3. Product Features:

- 3.1. High strength bond and specially compounded elastomers assure a long life and high load carrying capacity.
- 3.2. Low cost, light weight, compact, easy to install and maintenance free.

4. Selection/Ordering:

Static Load.

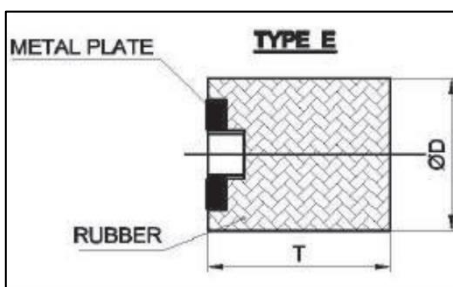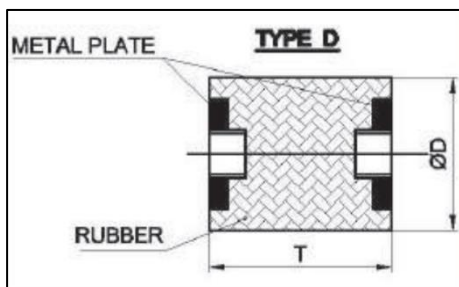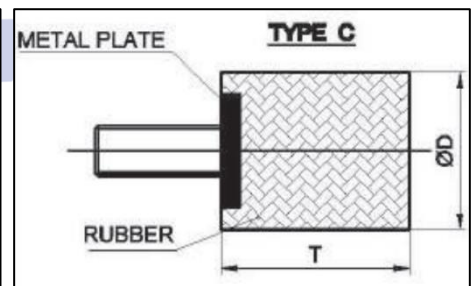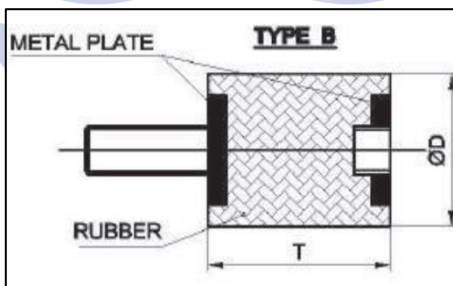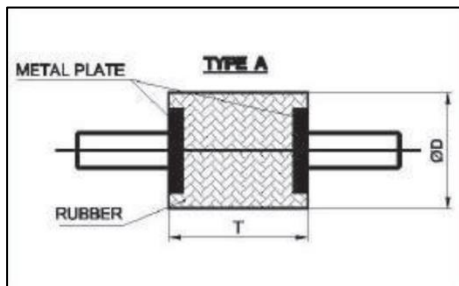

SPECIFICATIONS

Size	Type	Max Static Load (kg)	Deflection (mm)	DØ (mm)	T (mm)	Thread Size & Stud Length or Thread Depth	
						Bolt	Nut
BRM-13	A	4.5	1.0	13	13	3/16"BSWx13L	3/6"BSWx4 Deep
BRM-19	A	4.5	1.0	13	13	3/16"BSWx13L	3/6"BSWx4 Deep
BRM-16	A	4.5	1.0	13	13	3/16"BSWx13L	3/6"BSWx4 Deep
BRM-19	A	18	3.0	19	19	1/4"BSWx19L	1/4"BSWx6 Deep
	B	25	3.0	19	19		
BRM-20	A	6.0	3.0	20	25		
	B	6.0	3.0	20	25		
	A	16	1.5	25	19	5/16"BSWx22L	5/18"BSWx6 Deep
	B	22	1.5	25	19		
BRM-25	A	30	3.5	25	20	M6x1Px13L	M6x1Px6 Deep
	B	45	3.5	25	20		
BRM-25	A	50	3.5	25	22	M6x1Px13L	M6x1Px6 Deep
BRM-25	A	37	3.5	25	30	M8x1.25Px20L	M8x1.25Px6 Deep
	B	52	3.5	25	30		
BRM-30	A	64	3.5	30	22	M8x1.25Px25L	M8x1.25Px6 Deep
BRM-30	A	22	3.0	30	30	M8x1.25Px21L	M8x1.25Px6 Deep
BRM-35	A	64	3.0	35	22	3/8"BSWx38L	3/8"xBSWx6 Deep
	A	16	1.5	35	25	3/8"BSWx38L	3/8"xBSWx6 Deep
	B	21	1.5	35	25		
BRM-38	A	70	4	38	25	M8x1.25Px17L	M8x1.25Px6 Deep
	B	110	4	38	25		
BRM-38	A	50	6.0	38	38	M8x1.25Px17L	M8x1.25Px10 Deep
	B	67	6.0	38	38		
BRM-40	B	146	4.5	40	28	M10x1.25Px25L	M10x1.5Px6 Deep
BRM-40	B	60	5.0	40	30	M8x1.25Px25L	M8x1.25Px6 Deep
BRM-40	A	43	6.0	40	40	M10x1.5Px38L	M10x1.5Px10 Deep
	B	59	6.0	40	40		
BRM-50	A	651	5.0	50	40	M10x1.5Px22L	M10x1.5Px12 Deep
	B	110	5.0	50	40		
BRM-50	B	106	7.0	50	45	M10x1.5Px22L	M10x1.5Px12 Deep
BRM-50	A	76	7.0	50	50	M10x1.5Px22L	M10x1.5Px12 Deep

❖ Type C,D,E available as per customer requirement.

Note:

- Due to policy of continuous improvement, the specifications are subject to change without prior notice.
- Measurements are subject to 5% tolerance.
- To achieve good sound suppression, do not overload fitting.